

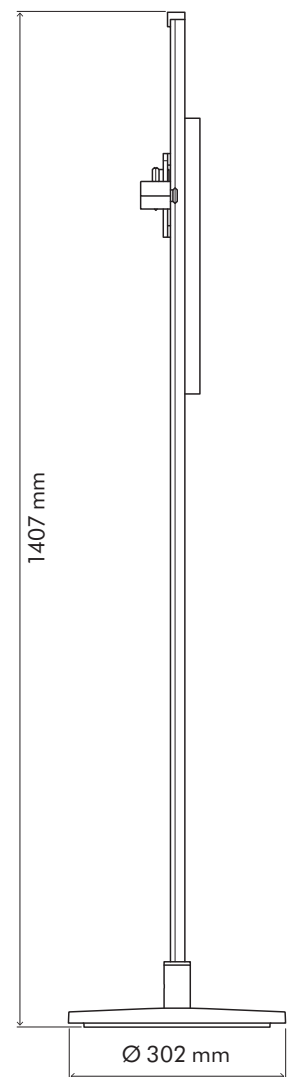


TECHNICAL SPECIFICATION

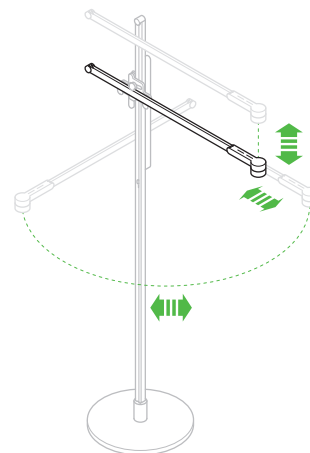

FRONT ELEVATION

SIDE ELEVATION

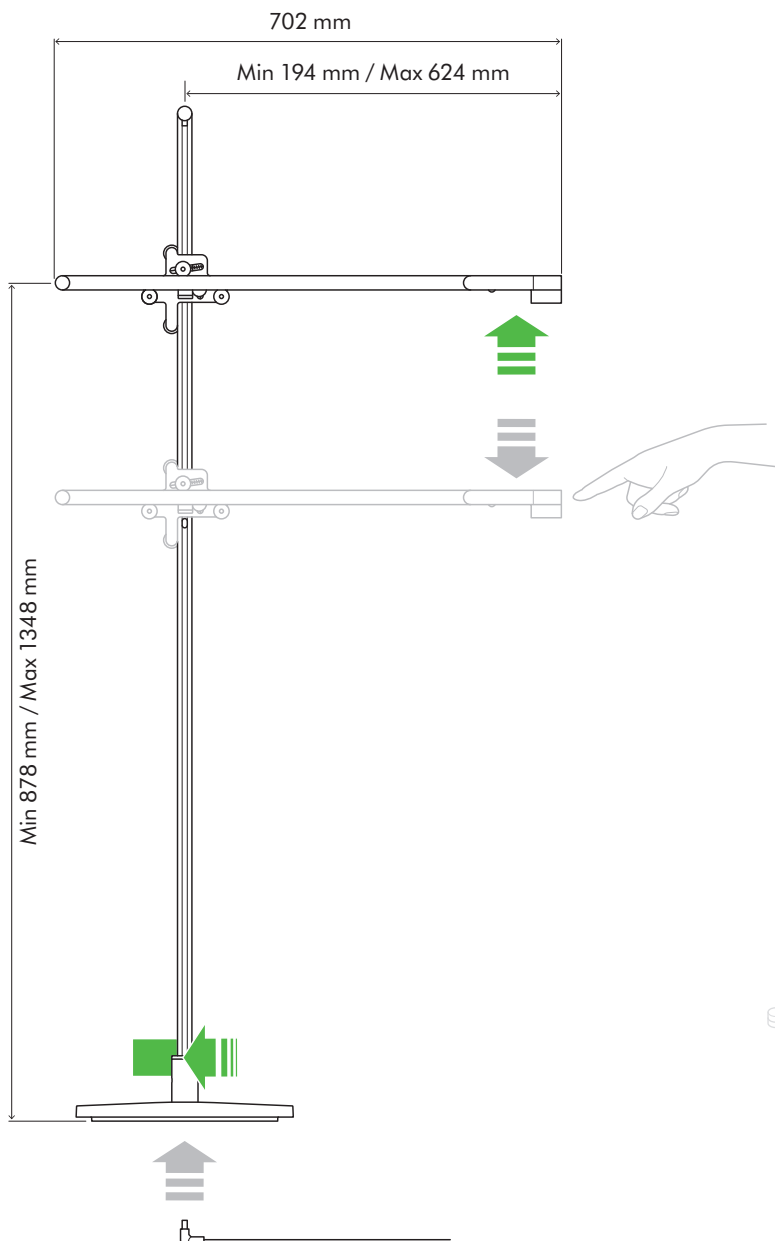

Dimensions with arm not extended

Height 1407 mm Width 702 mm Depth 302 mm

For further information please contact Dyson:
AU: 1800 426 337 AUCommercial@dyson.com
NZ: 0800 397 667 NZCommercial@dyson.com

dyson lightcycle floor

Electrical

Input voltage / Frequency: 100-240V 50/60Hz

Rated power: 15.8W

Power supply cord length: 3.2m

Electrical class: Class III

Optical

Light source: LED

Light output: 1120lm

Light output ratio: 82.1%

Luminous efficacy: 71lm/w

LED life time: 181,000 hours¹

Colour temperature: 2700K – 6500K

CRI: 90 MIN

R9: 48 MIN

Standby power consumption: <0.5W

Beam angle: 78 degrees

IP rating: Indoor use only

Operating temperature range: 0°-40°C, 32°-104°F

Flicker: <1%

Average lux level at full height, extension and max output
(at 630 mm over 800 mm diameter area): 1194lx

Features

USB-C charging point: 1.5A at 5V

Bluetooth® wireless technology

Construction

Materials: Aluminium / Copper / Steel / Polycarbonate Plastic

Operation

Precision dimming

Logistics

Net weight: 7.21kg

Packaged weight: 10.35kg

Packaged dimensions: 1487 mm (L) x 317 mm (W) x 112 mm (H)

Accreditation

Complies with

UL 153

CSA C22.2#250.4

IEC/EN 60598-1, IEC/EN 60598-2-4

AS/NZS 60598.1, AS/NZS 60598.2.4

GB 7000.1; GB7000.204; GB4943.1


IEC 60598-1, IEC 60598-2-4

IEC60598-1, IEC 60598-2-4

Standard guarantee

5 years parts and labour

Polar plot

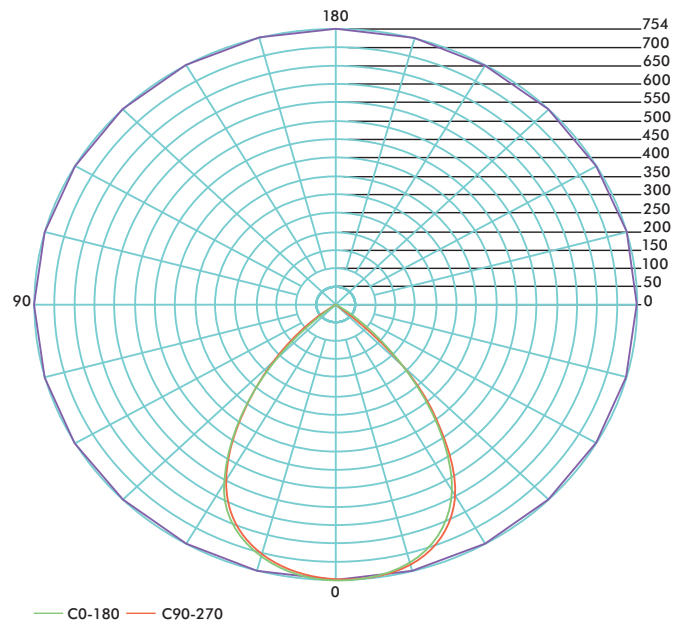


Product range

White/Silver



Black/Black

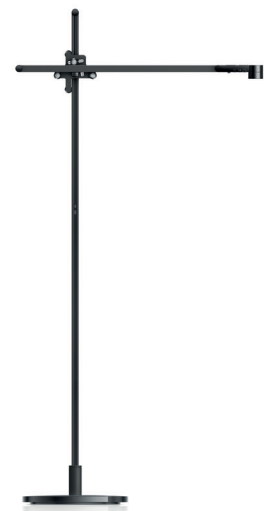

¹LED-life calculation is based on L70 measurement according to IEC, with an estimation of 8 hours' usage per day. Real-life results may vary.

For further information please contact Dyson:
AU: 1800 426 337 AUCommercial@dyson.com
NZ: 0800 397 667 NZCommercial@dyson.com